

08.

Installation File
Stop Profile

Overview

You are now in Installation File 1. Need another file?
Go to cladix.eu to download it.

1. **Installation File 1:** Support Structure
2. **Installation File 2:** L Profile (Optional)
3. **Installation File 3:** Start
4. **Installation File 4:** Alternate Start (Optional)
5. **Installation File 5:** Fill Packages
6. **Installation File 6:** Inward Corner (Optional)
7. **Installation File 7:** Outward Corner (Optional)
8. **Installation File 8:** Stop

Materials list



Safety glasses

Noise-reducing headphones

Gloves

Pencil



Measuring tape

(Vertical) level

Cross line laser level

Sawhorses or workbench (for materials) + accessories



Ladder

Regular screwdriver or impact drill

Self-tapping screws (+ Matching screw bits)

Chop and miter saw (or ordinary hand and/or metal saw)

CDX4015-200.3005

1x 

Stop Profile,
length 3005 mm

CDX4015-250.3005

1x 

Base clip,
length 3005 mm

CDX4015-200.3005

1x 

Trim clip,
length 3005 mm

Optioneel:



Vacuum cleaner

Tool belt

Tool kit

Plastic shims of various thicknesses

! ALWAYS FOLLOW THE MANUFACTURER'S OR SUPPLIER'S GUIDELINES AND PROCEDURES.
! ALWAYS ENSURE A SAFE WORKING ENVIRONMENT AND USE PERSONAL PROTECTIVE EQUIPMENT.

Step-by-step plan



Cut the profiles to the right size to match the height of your facade.

Wear personal protective equipment (PPE) while cutting.




Take the self-drilling screws. Hook the stop profile into the 1- or 2-line profile that was mounted last.




Place the base clip on the flat side of the stop profile. Again, make good use of the 4 mm play before screwing on the profile. Leave about 4 mm of clearance before securing the profile, so the wall can be fully clad to dimensions.

See the principle of our tongue-in-groove system explained here:
www.cladix.eu/tutorial/het-montagesysteem/

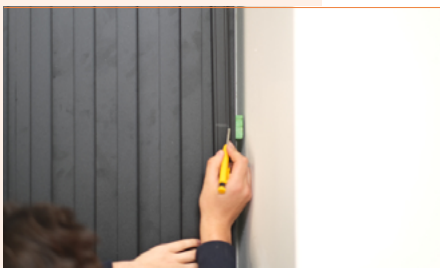

Mark the spots where the screws should go so that both the profile and the base clip will be firmly attached to the horizontal battens of the support structure.

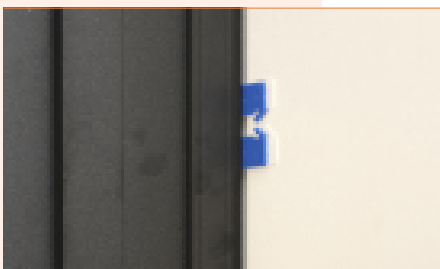

Mark the spots where the screws should go so that both the profile and the base clip will be firmly attached to the horizontal battens of the support structure.



Fasten the base clip now to the stop profile.

Tip: keep the speed of the drill low so the screws do not strip and lose their grip in the support structure.



Click de trim clip onto the base clip for a beautiful finish.



Your facade is now neatly clad and finished with Cladix.

Disclaimer

Publisher and Property

This document, both in its printed and digital form, is published by Cladix BV, located at Kunststal 19a, B-9900 Eeklo (Belgium). For more information, please contact us at www.cladix.eu.

Trademarks

All trademarks mentioned in Cladix BV communications are the property of Cladix BV or are legally. Any rights not expressly granted in this publication are reserved.

Reproduction and Use

No part of Cladix BV's publications, whether as digital or hard copy, may be reproduced, copied or translated without the prior written consent of Cladix BV. Written consent can be obtained from our managing director or the marketing department.

Liability and Content

Although Cladix BV compiles the information on this document and in other communications carefully and to the best of its knowledge, we accept no liability for errors and/or inaccuracies. The information and drawings in our documentation are indicative only. Cladix BV is not responsible for errors in these documents. All suggested scenarios are illustrative and should always be adapted to the specific construction situation by the contractor or installer. Some projects require specific stability calculations that are not provided by Cladix BV. These should be checked and calculated by the installer or contractor.

Use of Third Party Information

All references to and images by products or information by third parties are purely indicative. Their use must always be agreed on with the particular producer or supplier. Third-party information and drawings may require specific tools and knowledge to enable installation or use. It is the responsibility of the builder or installer to follow proper procedures and obtain the information.

Amendments and Local Legislation

Cladix BV reserves the right to amend any information used in any of our documents without prior notice. All construction and machining is subject to local legislation, rules and standards.

